


# S3-4K VR series

Compact 4K screen management systems with 3D stereo support

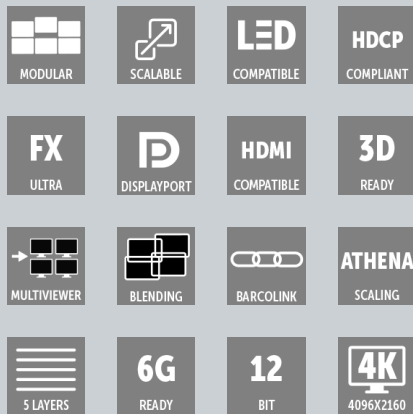

- **Native 4K input and output supported**
- **Easy expansion thanks to interlinking of chassis**
- **Compact and modular design**

Featuring 12 input channels, 4 PROGRAM outputs, 4 AUX outputs and 2 dedicated Multiviewer outputs, the S3-4K VR is the E2 VR image processor's more compact sidekick. Under the hood, however, it boasts the same processing performance, image quality, flexibility and rugged durability. In short: all the tools you need to manage your VR display system, in a single compact and rugged housing.

With the VR (Virtual Reality) version of the S3-4K screen management system you add 3D stereo capability to the Event Master product portfolio while benefiting from the unprecedented performance, expandability and reliability of the Event Master product family.

## Powerful features, easy operation

- Modular card-based design
- Interlinking of S3-4K VR chassis allows expansion of inputs, outputs or layers
- Easy set-up with the cross-platform Event Master Toolset, providing a step-by-step approach to system configuration
- Using the same modular cards as the E2 VR, the S3-4K VR is serviceable in the field and ready for future signal interfaces
- Dual, redundant power supplies for maximum peace of mind
- Widescreen blending support

## PRODUCT SPECIFICATIONS

## S3-4K VR SERIES

<b>Model</b>	NGS-3U / NGS-3U BTO
<b>Genlock</b>	Analog reference input/loop on BNC connectors; bi-level and blackburst at SD and tri-level at HD S3D Sync: 4x input Din connector, 2x output Din connector
<b>Program output</b>	4 program outputs configurable as single screens or tiled/blended widescreens <ul style="list-style-type: none"><li>Configurable from 4X 2048X1200@60 max to 1 x 4096x2400@60 max</li><li>Independent edge blending/feathering control for all four sides</li></ul>
<b>Scaled Aux outputs</b>	User definable from 4 x 2048x1200@60 to 1 x 4K@60 Output color correction
<b>Mixers</b>	<ul style="list-style-type: none"><li>Native resolution background mixer per output screen</li><li>Independent layer transitions or full Preview/Program transition</li><li>Flexible layer allocation – 4 scalable PIP/key layer mixers assignable to any Program output screens</li></ul>
<b>Video inputs</b>	12 inputs via 3 input cards (same cards as E2 Event Master Processor) <ul style="list-style-type: none"><li>Up to 3 x 4K inputs - each input card supports up to 4K@60p</li><li>4 x HDMI 1.4a (297 Mpix/sec max)</li><li>4 x DisplayPort 1.1 (330 Mpix/sec max)</li><li>4 x SD/HD/3G SDI (6G ready) (Optional)</li></ul>
<b>Video outputs</b>	10 outputs via 3 output cards (same cards as E2 Event Master Processor) <ul style="list-style-type: none"><li>Up to 2x 4K outputs - each output card supports up to 4K@60 p</li><li>4x HDMI 1.4a (297 Mpix/sec max)</li><li>2 x HDMI 1.4a for Multiviewer (297 Mpix/sec max)</li><li>4 x SD/HD/3G SDI (6G ready) (Optional)</li></ul>
<b>Still stores</b>	Available in background or PIP
<b>Layer effects</b>	<ul style="list-style-type: none"><li>Borders (hard, soft, halo) and drop shadows</li><li>Color effects</li><li>Strobe, H&amp;V flip</li><li>Luma key</li><li>PIP moves via Keyframes</li></ul>
<b>Multiviewer</b>	<ul style="list-style-type: none"><li>Flexible user-definable layouts</li><li>Monitor all Inputs and Outputs, including Preview and Aux</li><li>Two outputs</li><li>Dedicated hardware same as E2 Event Master Processor</li></ul>
<b>Expandability</b>	<ul style="list-style-type: none"><li>Easily expandable for larger display applications via proprietary links</li><li>Link units to increase available Inputs and Outputs for larger tiled/blended widescreen applications</li><li>Expansion via simple linking - up to 4 chassis</li><li>S3-4K ships with the ability to link 2 chassis for expansion. Linking up to 4 chassis will be available in a future software release.</li></ul>
<b>HDCP</b>	HDCP compliant
<b>Control</b>	<ul style="list-style-type: none"><li>Event Master screen management software for PC or MAC</li><li>Ethernet RJ-45, 1000/100/10 Mbps autosense</li></ul>
<b>Serviceability</b>	<ul style="list-style-type: none"><li>Field-Serviceable I/O and processing cards (not hot-swappable)</li><li>Hot swappable dual-redundant power supplies</li></ul>
<b>Dimensions</b>	<ul style="list-style-type: none"><li>Height: 13.26 cm / 5.22 inches 3 rack mount units</li><li>Width: 43.2 cm / 17 inches without chassis handles, 48.3 cm / 19 inches with chassis handles attached</li><li>Depth: 54 cm / 21.33 inches overall</li></ul>
<b>Weight</b>	24 kg / 53 lbs
<b>Power</b>	<ul style="list-style-type: none"><li>Input power: 100-240 VAC 50/60Hz 700W</li><li>Dual-redundant, hot-swappable power supplies; same as E2 Event Master processor</li></ul>
<b>Warranty</b>	3 years parts and labor

Last updated: 10 Sep 2019

Technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest information.