
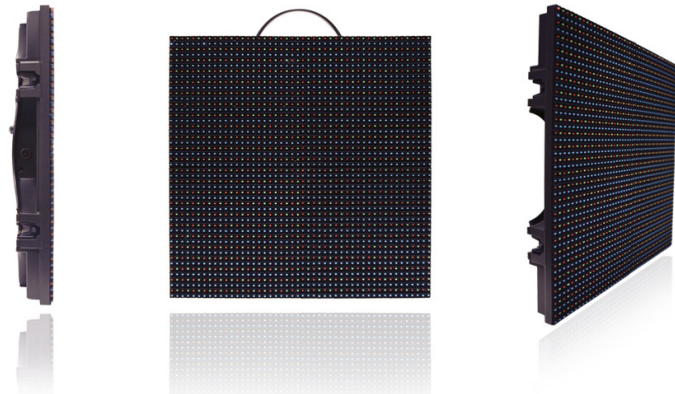


C8v

8mm pixel pitch (virtual), 8,000 nits LED tile

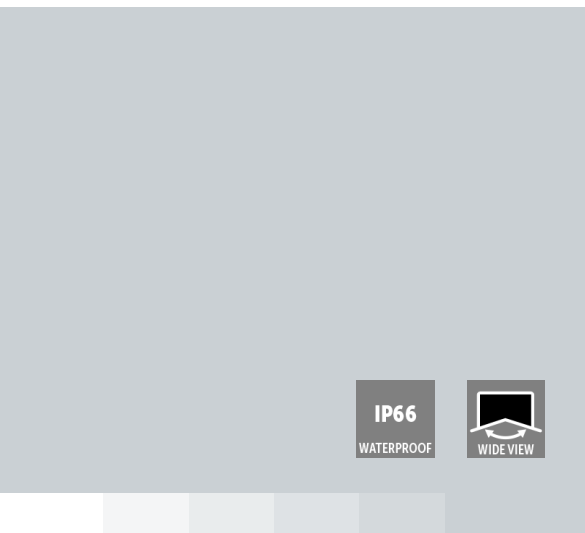

Barco's C8v LED display can be used for both rental and permanent installations, whether indoor or outdoor. The C8v consumes a fraction of the power consumption and heat generation of other LED displays. That's why it doesn't need cooling fans, resulting in noiseless and maintenance-free operation.

Furthermore, the C8v's thin and lightweight design allows for easy handling and installation. Tested to Mil-Spec 810F standards and featuring a fanless IP66 enclosure, it can withstand challenging environments.

PRODUCT SPECIFICATIONS**C8V**

Pixel pitch	16.7 mm
Brightness	8,000 nits
LED configuration	RGBC PTH
Hor. viewing angle	120° (min 50% brightness)
Vert. viewing angle	45° (min 50% brightness)
Lifetime	100,000 hours to 50% of initial brightness
Pixel density	virtual 14,400/m ² -1,340/ft ² -2,304/tile (48x48) real 3,600/m ²
Power consumption	53W/tile (max)
Operation power voltage	200-240V / 50-60Hz
Tile dimensions	Width: 400mm Height: 400mm Depth: 70mm
Weight / Tile	6.4 kg
IP rating	IP66/66
Processing	16 bit/color
Colors	281 trillion
Refresh rate	600-3,000Hz
Foot build-up	Max. 10 tiles high
Truss build-up	Max. 25 tiles high
Link interface	PXL
Serviceability	Front and back
Operating temperature	-20 -45°C
Storage temperature	-20 -50°C
Operational humidity	10-99%
Storage humidity	10-99%
Source compatibility	DVI, SD-SDI, HD-SDI
Operable digitizer	Vizomo
Certifications	ETL, CE, FCC, RoHS

Last updated: 24 Feb 2021

Technical specifications are subject to change without prior notice. Please check www.barco.com for the latest information.