


# F80-4K9

9,000 lumens, 4K UHD, DLP laser phosphor projector

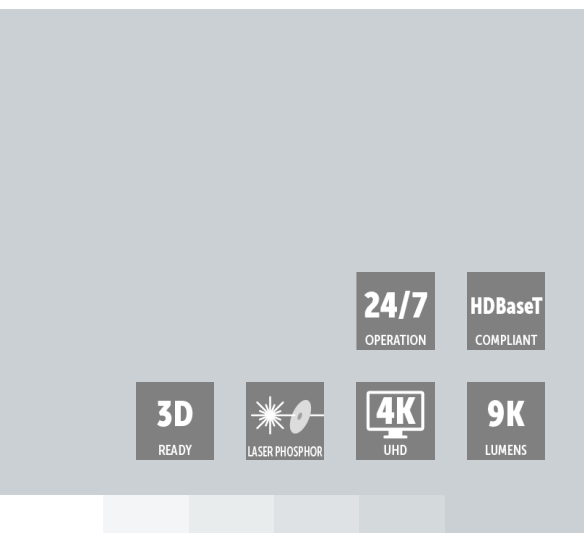

- **Stunning images with superb color performance**
- **Ultimate installation flexibility**
- **3D capable**

The stunning image quality and laser phosphor light source of Barco's F80 projectors enable you to provide exceptional experiences while saving both time and money. They're designed for fixed installation in a wide range of applications such as museums, board rooms, and auditoriums. Thanks to their 3D capability, they're also perfectly fit for theme park dark rides and interactive experiences.

### **Superior image quality**

The F80-4K9 delivers stunning images at 4K UHD resolution with a high level of detail, and highly saturated colors that allow for accurate color reproduction at all times. What's more it features the powerful Barco Pulse processing that allows for sharper images and less latency thanks to its Single Step Processing (SSP).

### **Unprecedented business value**

With this projector you can increase your uptime while driving costs down. Through its laser-phosphor light source and advanced cooling design, it provides a long operating time without need for lamp changes - resulting in considerable cost-savings on maintenance and consumables.

### **Ultimate installation flexibility**

The F80-4K9 gives you more flexibility in projector location and orientation as it can run in any orientation. Thanks to its wide array of all-glass lenses and wide lens shift ranges, the F80-4K9 accommodates almost any projector configuration.

**PRODUCT SPECIFICATIONS****F80-4K9**

<b>Projector type</b>	Single chip DLP laser phosphor projector
<b>Resolution</b>	3,840 x 2,400 (4K UHD) / 2,716 x 1,600 (WQXGA+ native)
<b>Brightness</b>	9,000 center lumen* 8,500 ANSI lumen 9,600 ISO lumen
<b>Contrast ratio</b>	1,200:1 sequential, 10,000:1 dynamic*
<b>Brightness uniformity</b>	> 90%
<b>Aspect ratio</b>	16:10
<b>Lens type</b>	GLD/FLDX/FLD+(lens adapter needed)
<b>Optical lens shift</b>	Vertical up to 125%, depending on lens Horizontal up to 50%, depending on lens Motorized zoom and focus (with lens memory on GLD and FLDX lenses) Motorized lens shift (with position memory on all lenses)
<b>Color space</b>	Rec. 709
<b>Color correction</b>	P7 RealColor™
<b>CLO (constant light output)</b>	Yes
<b>Light source</b>	Laser phosphor
<b>Light source lifetime</b>	> 20000 h in normal mode, > 12000 h in silent mode, > 40000 h in long life mode, > 12000 h in high brightness mode
<b>Sealed DLP™ core</b>	Yes
<b>Orientation</b>	360° rotation, no restrictions
<b>3D</b>	Active stereoscopic 3D / Passive stereo compatible
<b>Image processing</b>	Embedded warp & blend engine
<b>Keystone correction</b>	Yes
<b>Inputs</b>	12G-SDI, 2x DP 1.2, 2x dual link DVI-D, HDBaseT, HDMI2.0 (HDCP2.2, HDR10), RJ 45 Ethernet, DMX in/out, RS232 in, 2x USB, 12V out
<b>Input resolutions</b>	Up to 4K UHD @ 60Hz / Up to 2,560 x 1,600 @ 120Hz refresh rates: 24Hz to 120Hz for WQXGA+ (2716x1600) and 24Hz to 60Hz for 4K/4KUHD (4096 x 2160/ 3860 x 2400)
<b>Software tools</b>	Projector Toolset

**PRODUCT SPECIFICATIONS****F80-4K9**

Control	IR, RS232, RJ45, XLR wired
Network connection	10/100 Ethernet, RJ45
Power requirements	100-240V / 50-60Hz
24/7 operation	Yes**
Power consumption	950 W nominal, 1100 W maximum
BTU per hour	3,250 BTU/h nominal, 3,800 BTU/h maximum
Standby power	
Noise level (typical at 25°C/77°F)	35 dB(A)
Operating temperature	10°C (50°F)-40°C (104°F) (up to 1500m altitude) / 10° (50°F) -35°C (95°F) (up to 3000m altitude)
Storage temperature	-20 to 60 °C
Operating humidity	20-80% RH (non-condensed)
Storage humidity	20-90% RH (non-condensed)
Dimensions (WxLxH)	480 x 680 x 227 mm / 18.9 x 26.7 x 8.9 in
Weight	25.5 kg / 56.2 lbs
Standard accessories	Power cord, wireless remote control
Certifications	CE, FCC Class A, cNemkoUS, CCC, EAC, KSA, RCM, UkrSEPRO
Warranty	Limited 3 years on parts and labor(***) Extendable up to 5 years.

\* When measured with the GLD 1.43-2.12:1 lens in Wide Angle  
\*\* For optimal performance, switch off the projector regularly. For details please consult the manual.  
\*\*\* Except on light source: 20,000 hours in normal mode, or 3 years, whichever comes first.

Last updated: 21 Feb 2022

Technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest information.