
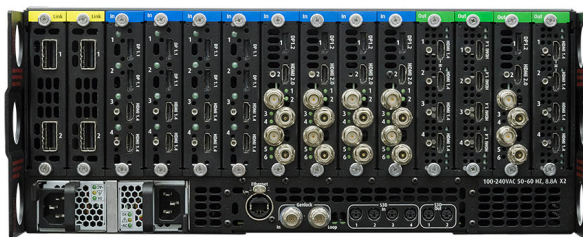


E2 Tri-combo

Procesador Event Master 4K60p a tamaño completo

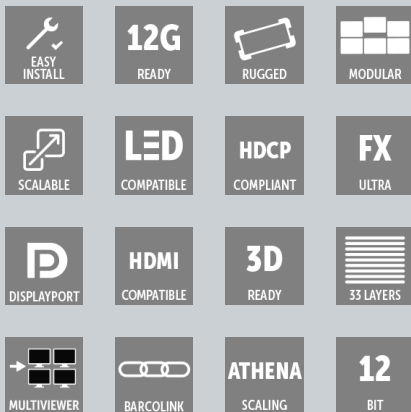

- **Control absoluto del espectáculo con tarjetas preconfiguradas**
- **Entrada y salida 4K a 60p nativa en un solo cable**
- **Interfaz de usuario intuitiva**

La configuración de Tri-Combo del E2 incluye cuatro tarjetas de entrada Tri-Combo y una tarjeta de salida Tri-Combo. Estas nuevas tarjetas admiten 4K a 60p en un solo cable. Con la versión de software 6.0 y superior, las tarjetas de entrada admiten 2x 4K a 60p en un solo cable o 6x entradas HD (cuando se instalan en ranuras de entrada de doble capacidad). La tarjeta de salida Tri-Combo admite 2x 4K a 60p o 6x HD. Esto aumenta la configuración del Tri-Combo E2 a unas impresionantes 40 entradas HD o 12 entradas 4K a 60p y hasta 5 salidas 4K a 60p o 18 HD. Este nuevo E2 dispone de una capacidad y flexibilidad adicionales para dar cabida a espectáculos en constante crecimiento.

ESPECIFICACIONES TÉCNICAS**E2 TRI-COMBO**

| | |
|----------------------------|--|
| Model | NGS-4U |
| Live effects canvas | Up to 20 Megapixels PWW/PGM 40 Megapixels PGM only 80 Megapixels @30p and PGM only |
| Video inputs | <ul style="list-style-type: none">■ 40 inputs via 8 input cards (HDMI/DP combo 4 inputs, Tri-combo 6 inputs per card)■ Up to 12x 4K inputs -(HDMI/DP combo 1x 4K@60p, Tri-Combo 2x 4K@60p per card)■ 16x SDI SD/HD/3G/6G/12G connectors■ 8 x HDMI 1.4a (297 MPix/sec max)■ 4 x HDMI 2.0 (594 MPix/sec max)■ 8 x DisplayPort 1.1 (300 MPix/sec max)■ 4 x DisplayPort 1.2 (600 MPix/sec max) |
| Video outputs | <ul style="list-style-type: none">■ 18 HD outputs via 4 output cards (Event Master series cards)■ Up to 5x 4K outputs■ HDMI output card supports 1 4K60p or 4 HD. Tri-combo supports 2 4K60p or 6 HD■ TriCombo output card supports 4 x SD/HD/3G/6G/12G 1x HDMI 2.0, and 1x DisplayPort 1.2 connectors■ 8x HDMI 1.4a (297 Mpix/sec max)■ 3x HDMI 1.4a output cards support 4 HDMI connectors each. The top two connectors of the card support up to 297 MPix/sec (2560x1600 typical). The bottom two connectors support 165 MPix/sec (1920x1200 typical).■ The right most HDMI card (slot 14) may also be used as a two output Multi-viewer. |
| Genlock | Analog reference input/loop on BNC connectors; bi-level and blackburst at SD and tri-level at HD S3D Sync: 4x input Din connector, 2x output Din connector |
| Program output | <ul style="list-style-type: none">■ Up to 18 program outputs configurable as single screens or tiled/blended widescreens (preview and Multi-Viewer not available in all configurations)■ Up to 16x 2048x1200@60p or 4x 3840x2400@60p■ Independent edge blending/feathering control for all four sides■ Tri-combo supports 90degree output rotation |
| Mixers | <ul style="list-style-type: none">■ Native resolution background mixer per output screen■ Independent layer transitions or full Preview/Program transition■ Flexible layer allocation – up to 16 mixable or 32 single scalable PIP/key layers assignable to Program output screens |
| Still stores | Up to 100 HD or 25 UHD, depending on the import file size |
| Layer effects | <ul style="list-style-type: none">■ Borders (hard, soft, halo) and drop shadows■ Color effects■ Strobe, H&V flip■ Luma, chroma and Cut/Fill keys (not all modes support keying)■ PIP moves via Keyframes |
| Multiviewer | <ul style="list-style-type: none">■ Flexible user-definable layouts■ Monitor all Inputs and Outputs, including Preview and Aux■ Two outputs■ Dedicated hardware same as E2 Event Master Processor |

ESPECIFICACIONES TÉCNICAS

E2 TRI-COMBO

| | |
|----------------------------------|--|
| Expandability | <ul style="list-style-type: none">■ Easily expandable for larger display applications via proprietary links■ Link units to increase available Inputs and Outputs for larger tiled/blended widescreen applications■ Expansion via simple linking<ul style="list-style-type: none">● Up to 8 E2 chassis can be linked● 2 linking cables are included with each E2 chassis |
| HDCP | HDCP compliance determined by installed cards. |
| Serviceability | <ul style="list-style-type: none">■ Field-Serviceable I/O and processing cards (not hot-swappable)■ Hot swappable dual-redundant power supplies |
| Noise Level | Max 52.9 dB avg. Fans at 100%. Fan speed is software-managed based on operating temperature. Reference ISO 7779 |
| Dimensions | Height: 17.8 cm (7.0 in) -4 RU Rack mount Width: 43.2 cm (17.0 in) -without chassis handles, 48.3 cm (19 in) with chassis handles attached Depth: 56.9 cm (22.4 in) from front panel to rear panel, 62.2 cm (24.5 in) overall |
| Weight | 31 kg (68 lbs) |
| Power | <ul style="list-style-type: none">■ Input power: 100-240 VAC 50/60Hz 826 Watt■ Dual-redundant, hot-swappable power supplies |
| Warranty | 3 years parts and labor |
| Environmental temperature | 0-40° C (32-104° F) |
| Environmental humidity | 0-95% Non-condensing |

Generado en: 10 Sep 2019

Las especificaciones técnicas pueden estar sujetas a cambios sin previo aviso. Consulte www.barco.com para obtener la información más actual.